# $ZEN_{71\,1/2^{\prime\prime}\times31\,5/8^{\prime\prime}\times22^{\prime\prime}}3272$



GENERAL OPTIONS				
Acrylic Colors: White	Standard			
Biscuit* and Bone* (Allow 3 weeks delivery)				
Others*: (Allow 6 to 8 weeks delivery)	17 00000 0000 00			
Chromotherapy 1 light (Specify trim color)	17.99999.0000.00			
Chromotherapy 2 lights (Specify trim color)	17.99999.0001.00			
Chromotherapy 4 lights (Specify trim color)	17.99999.0002.00			
Handle (max. 2) (submit drawing with order)	95.7077.106.XX			
Tiling Flange (submit drawing with order)				
ZEN 72 Removable Skirt (Not factory installed)				
D106 Waste (27") Chrome	62.4027.103.60			
Gel black neck pillow (12"x 4 1/4 x 1 1/4")	18.6000.100.20			
Rayola** (Specify control color)				
WHIRLPOOL OPTIONS				
A bathtub fitted with back jets may cause the pump to protrude by +/- 3" from the overall dimension.				
Whirlpool Jet finish: Chrome, White, Biscuit, Bone	Standard			
110v Inline Heater				
MASS-AIR/ACTIV-AIR OPTIONS				
Mass-Air Jet finish: White/Chrome Biscuit/Chrome Bone/Chrome	Standard			
Others: Chrome/Chrome				
Activ-Air Jet finish: Chrome, White, Biscuit, Bone	Standard			
Blower Hose extension 72"	95.5013.167.00			
Blower Hose extension /2				
Blower Hose extension 72 Blower Hose extension 96"	95.5013.168.00			
	95.5013.168.00 95.3012.101.00			

\*Customized products, non cancellable, non returnable. \*\*Not available with a neck pillow.

**ZEN SKIRT\*** 



\*For 2", 3" or 4" top lip bathtub

### **PRODUCT DESCRIPTION:**

Adjustable feet Contemporary style 5 days

Gloss finish resistant to stains and discoloration Acrylic thermoformed and reinforced with fiberglass Available with 1"\*, 2", 3"\* and 4" lip height

WATER CAPACITY: IMMERSION:		
82 gallons	Ilons 16 1/8 po	
BOX SIZE:		
74" x 36 1/2" x 24 1/2"		
NET WEIGHT:	GROSS WEIGHT:	
65 lbs	84 lbs	

\*Allow 3 weeks delivery.

Bathtub only

**ZEN3272** (with armrests) ZEN3272W

•	Whirlpool ZEN3272T (with armrests) ZEN3272WT	
	Included: 6 square turbo jets, 5 square micro-rotating back jets, 13 A pump, diverter valve and electronic control.	
	Mass-Air ZEN3272M	
<u> </u>	(with armrests) ZEN3272WM	
• ] :	Included: 19 (14-5) injectors, Optima blower	
	750W (1 1/2h.p.) with 300W heating element and	
	backlit electronic control.	
	Activ-Air ZEN3272A	
•	(with armrests) ZEN3272WA	
÷	Included: 51 micro-jets, Optima blower 750W (1 1/2h.p.) with 300W heating element	
****		
	and backlit electronic control.	
	Mass-Air/Whirlpool Combo ZEN3272C	
	(with armrests) ZEN3272WC	
	Included: 6 square turbo jets, 5 square	
· .	micro-rotating back jets, 14 Mass-Air injectors, 13 A	

.....

micro-rotating back jets, 14 Mass-All injectors, 15 A
pump, Optima blower 750W (1 1/2h.p.) with 300W heating
element, diverter valve and backlit electronic control.

	A
	Ino
	Inc
·	rota

#### ctiv-Air/Whirlpool Combo **ZEN3272CA** (with armrests) ZEN3272WCA

cluded: 6 square turbo jets, 5 square microtating back jets, 44 Activ-Air micro-jets, 13 A pump, Optima blower 750W (1 1/2h.p.) with 300W heating element, diverter valve and backlit electronic control.



#### Mass-Air/Activ-Air Combo ZEN3272CMA (with armrests) ZEN3272WCMA

Included: 51 Activ-Air micro-jets, 14 Mass-Air injectors, two Optima blowers 750W (1 1/2h.p.) with 300W heating element and backlit electronic control.

#### Activ-Air/Mass-Air/Whirlpool Combo ZEN3272TAM (with armrests) ZEN3272WTAM



Included: 6 square turbo jets, 5 square micro-rotating back jets, 44 Activ-Air micro-jets, 14 Mass-Air injectors, 13 A pump, two Optima blowers 750W (1 1/2 h.p.) with 300W heating element, diverter valve and backlit electronic control.



COMPLIANCE ATTESTATION Standard bathtubs CAN / CSA.B45.5 Hydromassage Standards CAN / CSA.B45.10 / CSA.C22.2 / UL-1795

# Certification ECORESPONSIBLE

## First manufacturer of bathroom products in North America to be certified ecoresponsible.




REV: 01-21





# ZEN 3272 WITH OR WITHOUT ARMRESTS

Bathtub


Without armrests

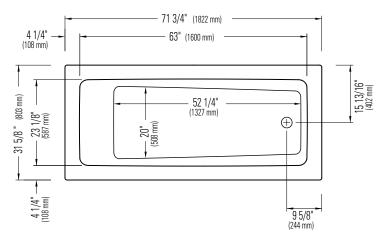





With armrests

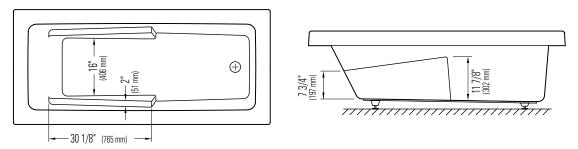

\*A bathtub fitted with back jets can cause the pump to protrude by approximately 3" from the overall dimension.

\*\*All dimensions are approximate and subject to change without notice. Please refer to the installation guide before beginning the installation